




Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your DD-2512-HD/05XX today!

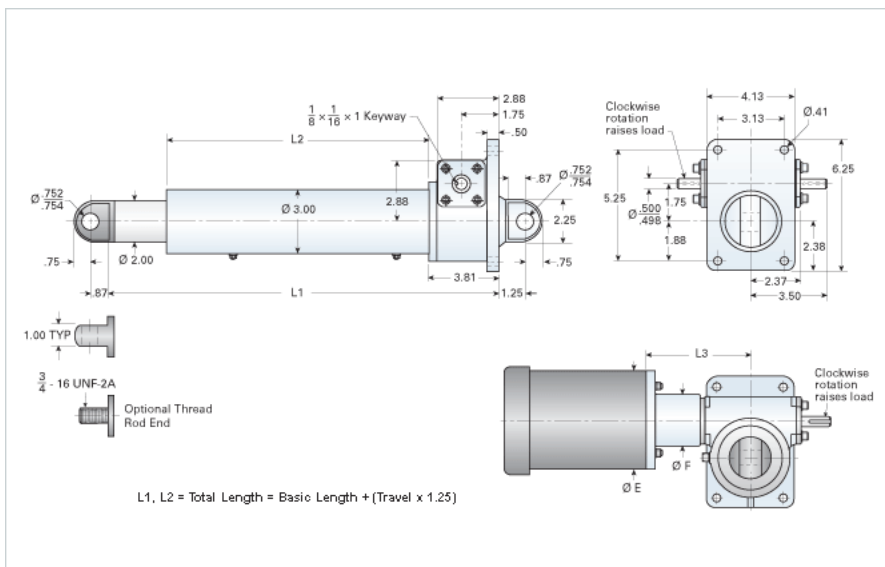

Performance Specifications	
Travel Rate [in/min]	36
Dynamic Capacity [lb]	2000
Rated Life [in]	4099999
Motor Horse Power [hp]	0.5
Maximum Rod Reaction Torque [in-lb]	89
Std. Brake Torque [ft-lb]	3
Approximate Stopping Distance No Load [in]	0.04
Approximate Stopping Distance Full Load [in]	0.06
Details	
Gear Ratio	12:1
Input Turns Per Inch Of Travel	48
Torque To Raise 1 lb. [in-lb]	0.0061
Max Capacity [lb]	5000
Max HP [hp]	1.5
Weight	
Basic Weight [lb]	33
Per Inch of Travel [lb]	1.05
Tube Dimensions	
L1 Basic Length [in]	12.44
L2 Basic Length [in]	7.13
NEMA 42 Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 48 Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 56C Dimensions	
L3 [in]	6.25
E [in]	6.62
F [in]	3.50
NEMA 182TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 184TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-
NEMA 213TC Dimensions	
L3 [in]	-
E [in]	-
F [in]	-