# Product Specification Sheet

## ActionJac 15-MSJ-UR 8:1

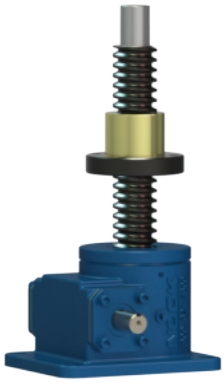

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ActionJac 15-MSJ-UR 8:1 today!

2D/3D CAD ONLINE

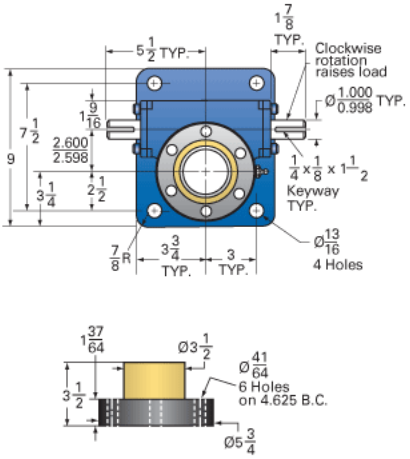





**For ordering, specify "L" dimension**

**L (min) = travel + 10 1/2**

| | |
|---|---|
| **Details** | |
| Capacity [Ton] | 15 |
| Gear Ratio | 8:1 |
| Turns of Worm per Inch Travel | 16 |
| Torque to Raise 1 lb. [in-lb] | 0.0407 |
| Lifting Screw Diameter [in] | 2.25 |
| Screw Lead [in] | 0.500 |
| Root Diameter [in] | 1.684 |
| Tare Drag Torque [in-lb] | 20 |
| **Performance Specifications** | |
| Maximum Allowable Input [hp] | 5.00 |
| Maximum Input Torque [in-lb] | 1221 |
| Maximum Worm Speed at Rated Load [rpm] | 258 |
| Maximum Load at 1750 RPM [lb] | 4424 |