


PowerAC 1 1/8"-5 RA w/Bronze Nut

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your PowerAC 1 1/8"-5 RA w/Bronze Nut today!

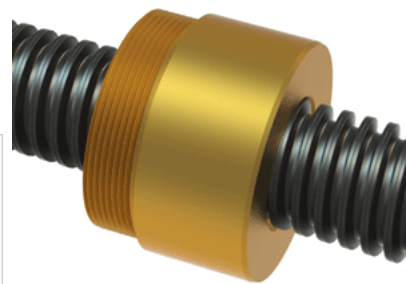

Rolled Inch Acme Screw

(Screw)Product Info

Screw Code	115-RA
Thread Direction	RH
Screw Material	4140 Series

(Screw)Details

Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Threads per Inch	5
Thread Code	115
Form	2C
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	20
End Code for Type 4 [* Journals may show tracings of the thread]	12

(Screw)Dimensions

A - Root Diameter Minimum [in]	0.875
D - Nominal Rod Diameter [in]	1.125

(Screw)Part Numbers

3 ft. Part Number	11115
6 ft. Part Number	12115
12 ft. Part Number	13115
20 ft. Part Number	

(Screw)Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

(Screw)Weight

Screw Weight [lb./ft.]	2.80
------------------------	------

Inch Acme Nut with Optional Flange

(Nut)Product Info

Part Number	20115
Thread Direction	RH
Type	Bronze

(Nut)Details

Lead [in]	0.200
Starts	1
Pitch [in]	0.200
Turns Per Inch	5
Lash (Maximum Axial) [in]	0.010
Nominal Rod Diameter [in]	1.125
Threads per Inch	5
Thread Code	115
Form	2C

(Nut)Dimensions

B [in]	1.50
C [in]	2.13
E [in]	0.50
F (n) Dia. [in]	(4) .397
F BCD [in]	3.440
G [in]	0.83
H [in]	4.20
J [in]	1.967-18

(Nut)Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.100
-------------------------------	-------

(Nut)Flange Part Numbers

Flange No-Lash Part Number	73420
Flange Part Number	FLG7572

(Nut)Weight

Flange Weight [lb]	3.19
Nut Weight [lb]	1.21

(Nut)Performance Specifications

Efficiency [%]	32
----------------	----

Lead Accuracy +/- [in/in]	0.0003
Dynamic Load Capacity [lb]	6330
Static Load Capacity [lb]	20500