


## PowerAC Trapezoidal Assembly 903 RS w/Bronze Nut

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC Trapezoidal Assembly 903 RS w/Bronze Nut

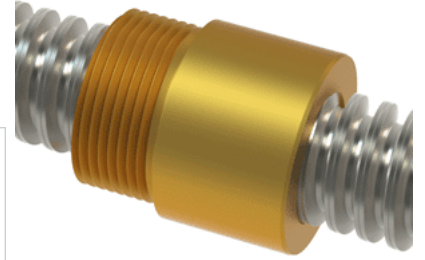

### Trapezoidal Lead Screw (Screw)Product Info

Screw Code	903 RS
Screw Material	300 Series Stainless
Thread Direction	RH

### (Screw)Details

Diameter	20
Lead	4
Starts	1
Pitch [mm]	4
Lead Accuracy +/- [ $\mu$ m/25mm]	6.25
Thread Code	903
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	12
End Code for Type 4 [* Journals may show tracings of the thread]	8

### (Screw)Dimensions

A - Root Diameter Minimum [mm]	14.90
D - Nominal Rod Diameter	20

### (Screw)Part Numbers

1800 mm Part Number	55903
3600 mm Part Number	56903
900 mm Part Number	54903

### (Screw)Weight

Weight Per Meter [kg]	2
-----------------------	---

### Trapezoidal Lead Nut

#### (Nut)Product Info

Part Number	20903
Thread Direction	RH
Type	Bronze

#### (Nut)Details

Diameter	20
Lead [mm]	4
Starts	1
Pitch [mm]	4
Lash (Maximum Axial in) [mm]	0.24
Nominal Rod Diameter	20
Thread Code	903

#### (Nut)Dimensions

B [mm]	32.0
C [mm]	34.0
E [mm]	13.00
F (n) Dia. [mm]	(4) 7.00
F BCD [mm]	60.00
G [mm]	14.0
H [mm]	75.0
J [mm]	M30x1.5

#### (Nut)Forces and Torques

Torque to Raise 1 kN [Nm]	1.818
---------------------------	-------

#### (Nut)Flange Part Numbers

Flange Part Number	72003
--------------------	-------

#### (Nut)Weight

Flange Weight [kg]	0.39
Nut Weight [g]	173

#### (Nut)Performance Specifications

Efficiency [%]	35
Lead Accuracy +/- [ $\mu$ m/25mm]	6.25
Dynamic Load Capacity [N]	13790
Static Load Capacity [N]	44128