
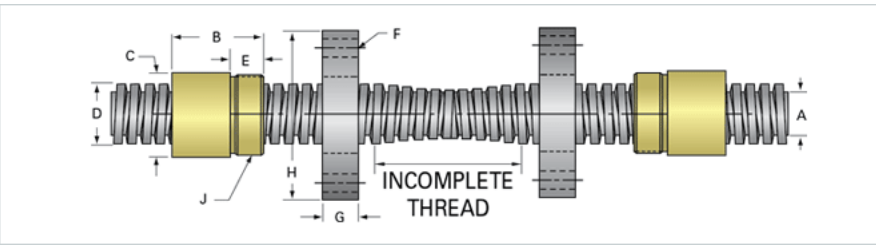


## PowerAC 1 1/2"-2 2/3 TA w/Bronze Nut

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerAC 1 1/2"-2 2/3 TA w/Bronze Nut today!

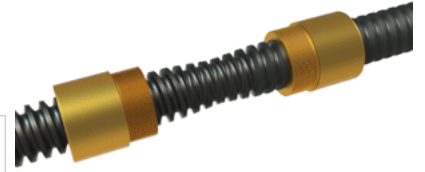

### Rolled Inch Twin-Lead Acme Screw (Twin-Lead Screw)Product Info

Screw Code	153 TA
Screw Direction	RH/LH
Screw Material	4140 Series

### (Twin-Lead Screw)Details

Lead [in]	0.375
Starts	1
Pitch [in]	0.375
Turns Per Inch	2.66
Threads per Inch	2.66
Thread Code	153
Form	40
End Code for Types 1,2,3,5 [* Journals may show tracings of the thread]	15
End Code for Type 4 [* Journals may show tracings of the thread]	16

### (Twin-Lead Screw)Dimensions

A - Root Diameter Minimum [in]	1.066
D - Nominal Rod Diameter [in]	1.500
Incomplete Overlapping Thread Length [in]	3.75
Maximum Overall Length [in]	144
Maximum Useable LH & RH Thread [in]	70.13

### (Twin-Lead Screw)Weight

Weight Per Foot [lb]	4.55
----------------------	------

### (Twin-Lead Screw)Part Numbers

36" Part Number	
72" Part Number	
144" Part Number	

### (Twin-Lead Screw)Performance Specifications

Lead Accuracy +/- [in/in]	0.0003
---------------------------	--------

### Inch Acme Nut with Optional Flange

#### (Nut)Product Info

Part Number	80153
Thread Direction	LH
Type	Bronze

#### (Nut)Details

Lead [in]	0.375
Starts	1
Pitch [in]	0.375
Turns Per Inch	2.67
Lash (Maximum Axial) [in]	0.010
Nominal Rod Diameter [in]	1.500
Threads per Inch	2.67
Thread Code	153
Form	40

#### (Nut)Dimensions

B [in]	2.30
C [in]	2.13
E [in]	0.81
F (n) Dia. [in]	(4) .397
F BCD [in]	3.440
G [in]	0.83
H [in]	4.20
J [in]	1.967-18

#### (Nut)Forces and Torques

Torque to Raise 1 lb. [in-lb]	0.149
-------------------------------	-------

#### (Nut)Flange Part Numbers

Flange No-Lash Part Number	73420
Flange Part Number	FLG7572

#### (Nut)Weight

Flange Weight [lb]	3.19
Nut Weight [lb]	1.49

<b>(Nut)Performance Specifications</b>	
Efficiency [%]	40
Lead Accuracy +/- [in/in]	0.0003
Dynamic Load Capacity [lb]	11250
Static Load Capacity [lb]	36000
<b>(Nut on Other Side)Product Info</b>	
Part Number	20153
Thread Direction	RH
Type	Bronze
<b>(Nut on Other Side)Details</b>	
Lead [in]	0.375
Starts	1
Pitch [in]	0.375
Turns Per Inch	2.67
Lash (Maximum Axial) [in]	0.010
Nominal Rod Diameter [in]	1.500
Threads per Inch	2.67
Thread Code	153
Form	40
<b>(Nut on Other Side)Dimensions</b>	
B [in]	2.30
C [in]	2.13
E [in]	0.81
F (n) Dia. [in]	(4) .397
F BCD [in]	3.440
G [in]	0.83
H [in]	4.20
J [in]	1.967-18
<b>(Nut on Other Side)Forces and Torques</b>	
Torque to Raise 1 lb. [in-lb]	0.149
<b>(Nut on Other Side)Flange Part Numbers</b>	
Flange No-Lash Part Number	73420
Flange Part Number	FLG7572
<b>(Nut on Other Side)Weight</b>	
Flange Weight [lb]	3.19
Nut Weight [lb]	1.49
<b>(Nut on Other Side)Performance Specifications</b>	
Efficiency [%]	40
Lead Accuracy +/- [in/in]	0.0003
Dynamic Load Capacity [lb]	11250
Static Load Capacity [lb]	36000