
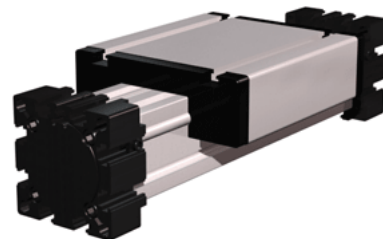


ELR 60S

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your ELR 60S today!

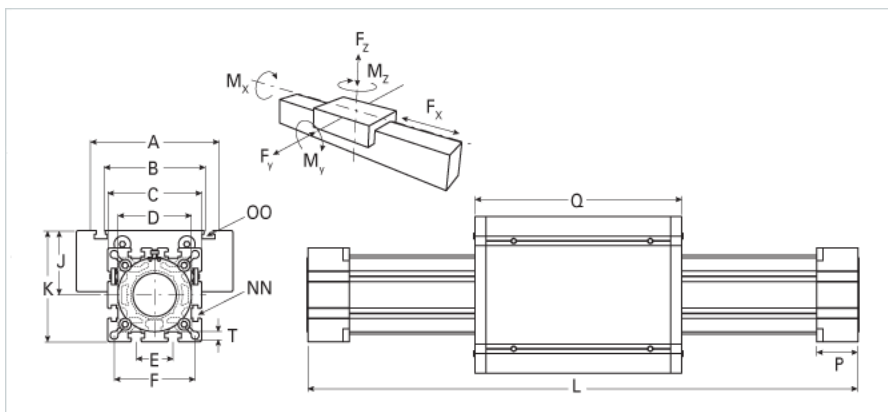

Details	
Size	60S
Dimensions	
Basic Length L [mm]	265
A [mm]	170
B [mm]	108
C [mm]	82
D [mm]	62x1
E [mm]	30
F [mm]	69
G [mm]	-
H [mm]	-
K [mm]	94
MM	-
NN	M8
OO	M8
P [mm]	35
Q [mm]	194
T-Diameter [mm]	8.5
Forces and Torques	
F _x dynamic [N]	-
F _y dynamic [N]	3100
F _z dynamic [N]	1600
M _x dynamic [Nm]	65
M _y dynamic [Nm]	140
M _z dynamic [Nm]	170
F _x static [N]	-
F _y static [N]	4100
F _z static [N]	2160
M _x static [Nm]	88
M _y static [Nm]	190
M _z static [Nm]	230
No-load torque Maximum [m/s]	5
Geometrical moments of inertia of aluminum profile	
Elastic modulus [N/mm ²]	70000
I _x [mm ⁴]	679000
I _y [mm ⁴]	697000
Weight	
Additional Weight per 100 mm [kg]	0.61
Basic Weight [kg]	4.1