


## DD-1020-HD

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your DD-1020-HD today!

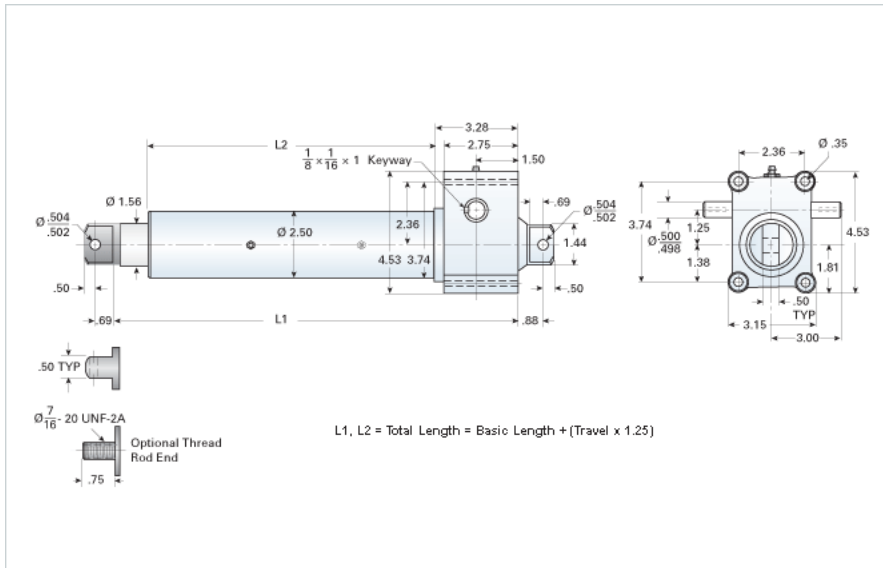

### Details

Gear Ratio	20:1
Max Capacity [lb]	2000
Input Turns Per Inch Of Travel	100
Torque To Raise 1 lb. [in-lb]	0.0045
Ball Screw	0750-0200 SRT RA
Screw Lead [in]	0.200
Root Diameter [in]	0.602
Max HP [hp]	0.25

### Weight

Basic Weight [lb]	19
Per Inch of Travel [lb]	0.77

### Tube Dimensions

L1 Basic Length [in]	10.75
L2 Basic Length [in]	6.38

### NEMA 42 Dimensions

L3 [in]	4.48
E [in]	4.63
F [in]	2.69

### NEMA 48 Dimensions

L3 [in]	4.48
E [in]	4.63
F [in]	3.12

### NEMA 56C Dimensions

L3 [in]	5.71
E [in]	6.63
F [in]	3.75

### NEMA 182TC Dimensions

L3 [in]	-
E [in]	-

### NEMA 182TC/18TCc Dimensions

F [in]	-
--------	---

### NEMA 184TC Dimensions

L3 [in]	-
E [in]	-
F [in]	-

### NEMA 213TC Dimensions

L3 [in]	-
E [in]	-
F [in]	-