




Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your RAD-5066-A3 today!

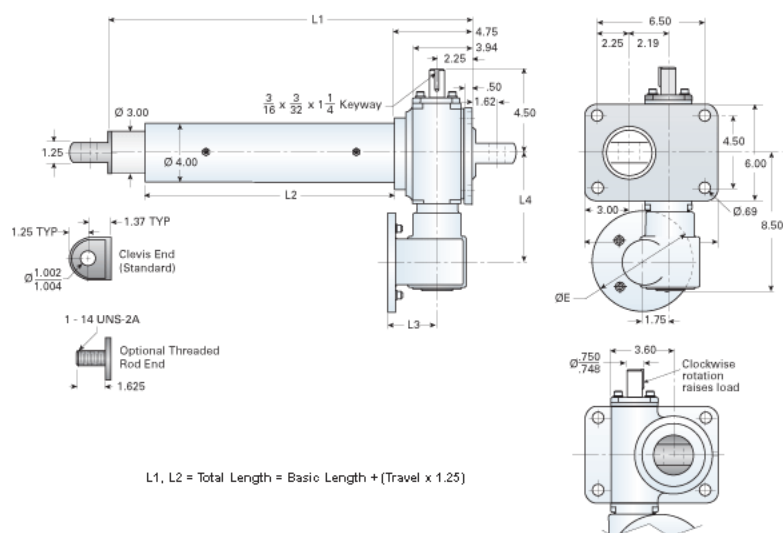

Gear Ratio Primary Reduction
Gear Ratio Secondary Reduction
Max Capacity [lb]
Input Turns per Inch of Travel
Torque to Raise 1 lb. [in-lb]
Acme Screw
Screw Lead [in]
Root Diameter [in]
Max HP [hp]

6:1
6:1
10000
96
0.0096
1 1/2-2 2/3 RA
0.375
1.066
1

Basic Weight [lb]
Per Inch of Travel [lb]

66
1.87

L1 Basic Length [in]
L2 Basic Length [in]

12.38
6.06

L3 [in]
L4 [in]
E [in]

3.69
5.63
6.69

L3 [in]
L4 [in]
F [in]

—