
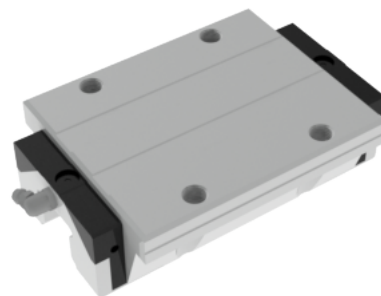



NHRC 25 FL

Call 800-321-7800 or visit us online at www.nookindustries.com to configure and order your NHRC 25 FL today!



Details

Size [mm] 25

Dimensions

W [mm] 70
 L [mm] 105
 L1 [mm] 86
 h2 [mm] 30
 P1 [mm] 45
 P2 [mm] 57
 M1 [mm] M6 Thru Bolt
 M × g2 M8 × 12
 T [mm] 12
 N1 M6 × 7.5
 N2 M3 × 6.5
 N3 [O-Ring Seal] P4
 E [mm] 12
 S1 [mm] 8
 S2 [mm] 12.3
 S3 [mm] 23.5
 S4 [mm] 24.5

Forces and Torques

Basic Load Ratings C [kN] 30.7
 Basic Load Ratings C0 [kN] 57.7
 Static Moment Ratings-Ma [N-m] 710.0
 Static Moment Ratings-Mb [N-m] 710.0
 Static Moment Ratings-Mc [N-m] 735.0

Weight

Weight-Block [g] 605