


## PowerTrac SRT 3000 - 0660 RH

Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your PowerTrac SRT 3000 - 0660 RH today!

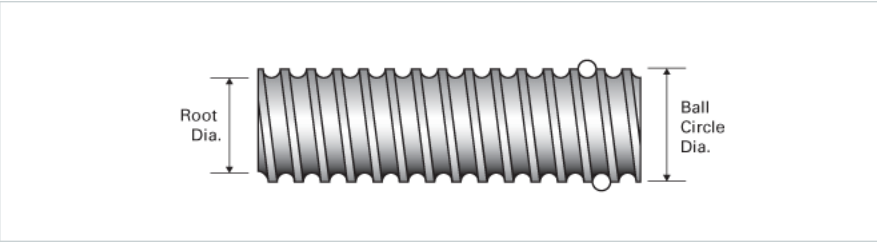

| Product Info  |                  |
|---|------------------|
| Screw Code  | 3000-0660 SRT RA |
| Precision   | SRT              |
| Screw Material  | 4150             |
| Thread Direction  | RH               |
| Details   |                  |
| Ball Circle Diameter [in]   | 3.000            |
| Lead [in]   | 0.660            |
| Root Diameter [in]  | 2.480            |
| End Code for Types 1,2,3,5 [* Journals may show tracings of the thread] | 60               |
| End Code for Type 4 [* Journals may show tracings of the thread]        | 39               |
| Performance Specifications  |                  |
| Lead Accuracy +/- [in./ft.]   | 0.0080           |
| Part Numbers  |                  |
| 2 ft. Part Number   |                  |
| 4 ft. Part Number   | SRT5073          |
| 6 ft. Part Number   |                  |
| 8 ft. Part Number   | SRT5080          |
| 12 ft. Part Number  | SRT5087          |
| 16 ft. Part Number  | SRT0443          |
| 20 ft. Part Number  | SRT0607          |
| Weight  |                  |
| Screw Weight [lb./ft.]  | 19.60            |