

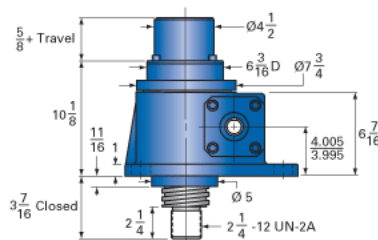


## ActionJac 30-MSJ-IK 32:1


Call 800-321-7800 or visit us online at [www.nookindustries.com](http://www.nookindustries.com) to configure and order your ActionJac 30-MSJ-IK 32:1 today!

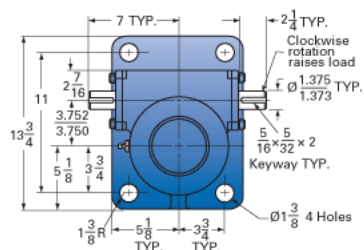

Top Plate (optional): 9000-00-07



Clevis End (optional): 9001-00-08



### Details

|                               |        |
|-------------------------------|--------|
| Capacity [Ton]                | 30     |
| Gear Ratio                    | 32:1   |
| Turns of Worm per Inch Travel | 48     |
| Torque to Raise 1 lb. [in-lb] | 0.0270 |
| Lifting Screw Diameter [in]   | 3.38   |
| Screw Lead [in]               | 0.667  |
| Root Diameter [in]            | 2.652  |
| Tare Drag Torque [in-lb]      | 50     |

### Performance Specifications

|                                        |                    |
|----------------------------------------|--------------------|
| Maximum Allowable Input [hp]           | 3.50               |
| Maximum Input Torque [in-lb]           | 1411               |
| Maximum Worm Speed at Rated Load [rpm] | 136                |
| Maximum Load at 1750 RPM [lb]          | 4668               |
| Starting Torque                        | 2 x Running Torque |

### Weight

|                         |      |
|-------------------------|------|
| Base 0 Travel [lb]      | 145  |
| Per Inch of Travel [lb] | 2.90 |
| Grease [lb]             | 1.5  |